



Skips must be painted in light and bright colours and pasted with the correct retroreflective stickers to be visible for road users. Skips must be seen clearly at all times to forewarn road users of the presence of skips, especially during inclement weather and in the dark.

### Approved Retroreflective Sheeting Colours

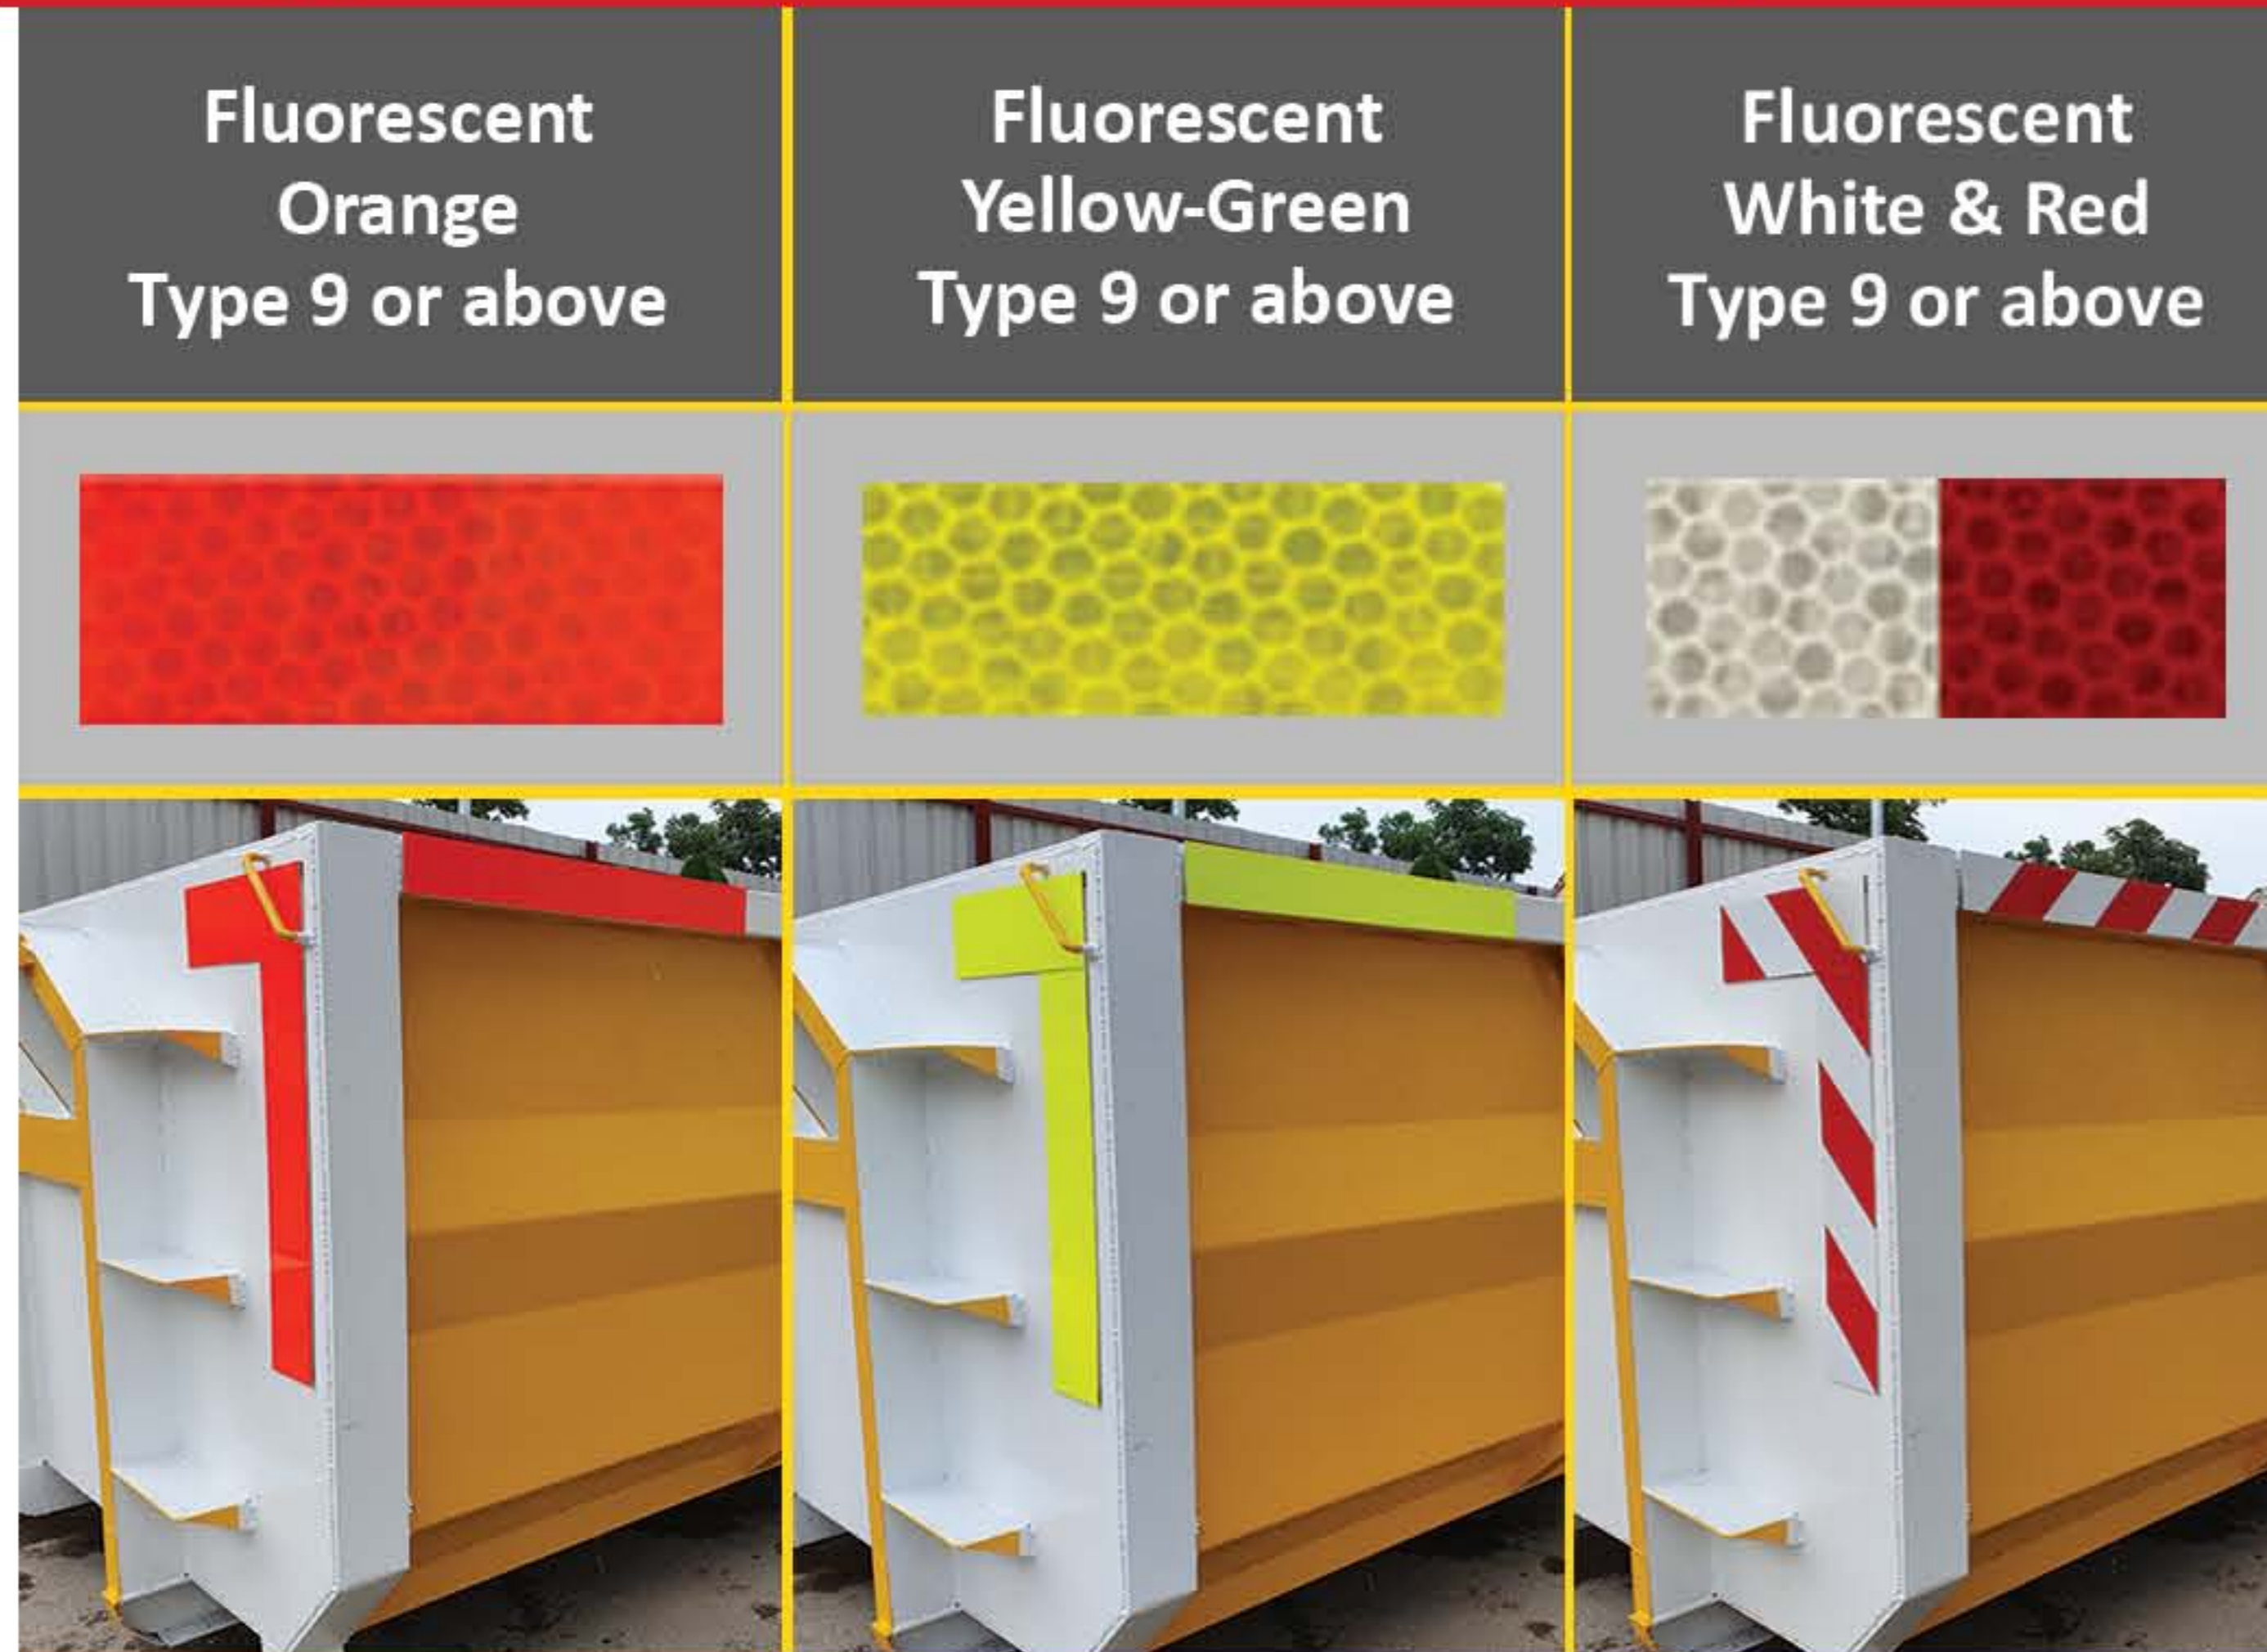

Examples of fluorescent retroreflective sheeting strips on skip

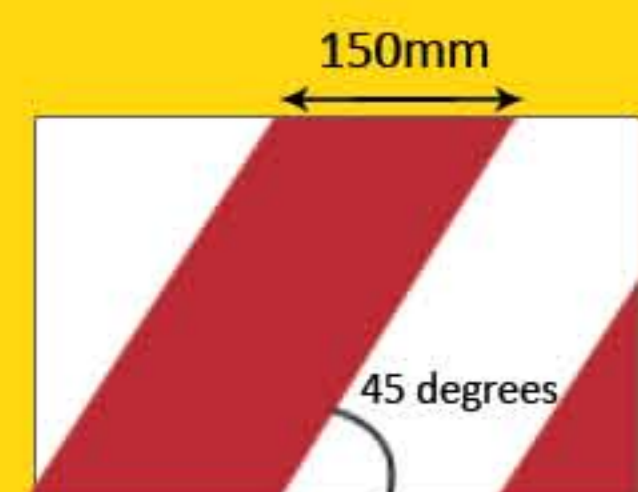

Wide-angle prismatic retroreflective sheeting of minimum Type 9 or above in accordance with ASTM D4956 standard specification for retroreflective sheeting for traffic control.



### Placement of Skips on Public Street

Skips are construction apparatus, deployed at building construction worksites, meant for containing and the disposal of construction materials and debris. However, where space is a constraint, skips may be allowed on public streets for loading purposes only during the off-peak hours.

### Off-Peak Hours

Weekdays:	9.30am to 4.30pm
Saturdays:	9.30am to 12noon 2.00pm to 4.30pm
Skips placed at locations near to a school:	9.30am to 11.30am 2.30pm to 4.30pm

*Important note: Skips are to be removed immediately from public streets if they cause any congestion, notwithstanding the off-peak hours.*

### Penalties

Street Works Act	Fine
Any offence related to marking and placement of skips	Fine not exceeding \$2,000. In the event of a continued offence, a further fine not exceeding \$100 per day will be imposed.

For enquiries, please visit our website:  
[www.lta.gov.sg](http://www.lta.gov.sg)

Printed Date: 30/09/2022

Information is correct at the time of printing and is subject to change without notice.

# Guidelines for Placing Skips on Public Streets



Owners and users are advised to plan the removal of construction debris to minimise the duration of skips placed on public streets. They shall comply with the prevailing requirements and guidelines as stipulated by the other agencies for placing skips on public streets.

## Good Practices



Place skip in roadside parking lots, where available, by seeking relevant approval from HDB or URA before use.

Skip shall not be placed at:

- Expressways
- Major roads
- Public walkways or footpath
- Near traffic junctions
- Near road bends



Without parking restrictions:

- Leave at least 3.5m width from where the skip is placed to facilitate safe movement of vehicles.
- Deploy workmen\* to guide road users if it is lesser than 3.5m width from where the skip is placed.



With parking restrictions:

- Skips shall not be left unattended.
- Deploy workmen\* to guide road users.



The door/opening of skip must:

- Always be closed when not in use.
- Not face oncoming traffic.



Skip shall:

- Bear the company name and contact number on both sides of the skip.
- Be marked with the correct type of retroreflective sheeting using the approved colours by LTA.
- Not alter/affect public street structures or road-related facilities.



\*The workmen must wear proper safety vests and be equipped with the correct traffic control devices to guide road users.